


TECHNICAL DATA SHEET

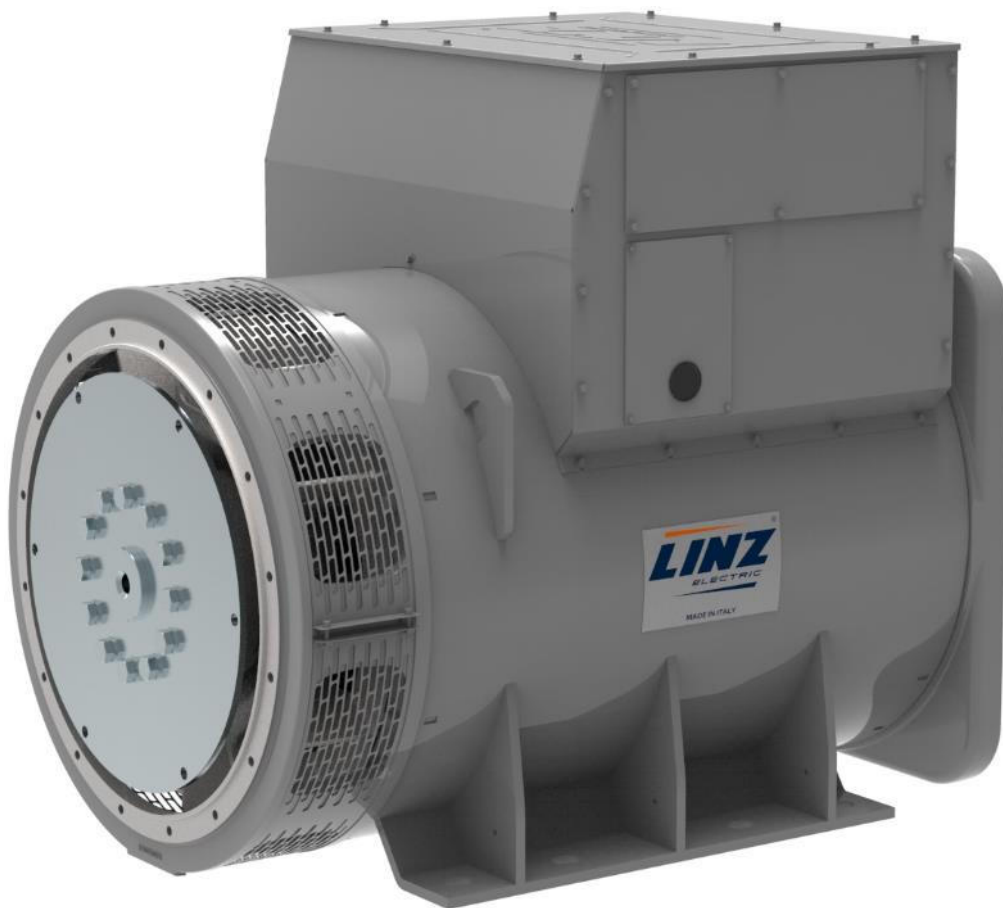

ALTERNATOR PRO40S A/4

Three-Phase brushless synchronous alternator with AVR - 4 poles

PRO40S A/4

COMMON DATA

Rated Power at 50Hz	kVA	930
Rated Power at 60Hz	kVA	1116
Rated Power Factor		0,8
Nominal Temperature	°C	40
Control System		self-excited
Execution		brushless
Regulation Type		AVR
Insulation Class		H
Protection		IP23
Maximum Over speed	rpm	2250
Overload		110% of rated power for one hour in a cycle of 6 hours
Air Flow Requirement	m ³ /min	94 at 50Hz 113 at 60Hz
R.F.I. Suppression		Standard EN55011

REGULATION DATA

AVR	HVR30
Sensing	three-phase
Voltage Regulation	±1%
Sustained Short Circuit	> 300% of rated current

WINDING DATA

Stator Winding	Double layer with auxiliary winding	
Rotor Winding	with damping cage	
Winding Pitch	2/3	
Number of Leads of Stator	6*	
Stator Winding Resistance	Ω	0,0101 at 20°C
Rotor Winding Resistance	Ω	0,687 at 20°C
Exciter Stator Resistance	Ω	13,3 at 20°C
Exciter Rotor Resistance	Ω	0,051 at 20°C
THD at full load	<3%	
THD at no load	<3%	
Excitation at no load	Adc	0,71
Excitation at full load	Adc	2,71

Note (*): 230/400V - 460/800V 50Hz
277/480V - 554/960V 60Hz

STANDARD

References	EN60034-1 ISO8528-3 EN55011
------------	-----------------------------

PRO40S A/4

ELECTRICAL DATA

Frequency		50Hz - 1500rpm				60Hz - 1800rpm			
Voltage Series Star	V	380/220	400/230	415/240	440/254	415/240	440/254	460/266	480/277
Rated Power in Class H (125°C/40°C)	kVA	930	930	930	890	1050	1100	1116	1116
	kW	744	744	744	712	840	880	892,8	892,8
Rated Power in Class F (105°C/40°C)	kVA	870	870	870	820	975	1025	1044	1044
	kW	696	696	696	656	780	820	835,2	835,2
Rated Power Standby (150°C/40°C)	kVA	1000	1000	1000	960	1090	1150	1200	1200
	kW	800	800	800	768	872	920	960	960
Rated Power Standby (163°C/27°C)	kVA	1050	1050	1050	1000	1120	1200	1260	1260
	kW	840	840	840	800	896	960	1008	1008

EFFICIENCY IN CL. H

4/4	95,3%							96,1%
3/4	95,7%							96,4%
2/4	94,8%							95,6%
1/4	92,0%							93,2%

REACTANCES AND TIME CONSTANTS

pcc		0,31							
X _d - dir. axis synchronous		289%	261%	242%	206%	329%	306%	284%	261%
X' _d - dir. axis transient		31,0%	28,0%	26,0%	22,1%	35,2%	32,8%	30,5%	28,0%
X'' _d - dir. axis subtransient		13,3%	12,0%	11,1%	9,5%	15,1%	14,1%	13,1%	12,0%
X _q - quad. axis reactance		153%	138%	128%	109%	174%	162%	150%	138%
T' _{do} - O.C. field time constant		1794ms							
T' _d - Transient time constant		185ms							
T'' _d - Sub-transient time constant		19ms							

MECHANICAL DATA


Bearing non drive end	6318-2RS1-C3		
Bearing drive end (B3/B14 form)	6324-C3		
Weight of generator in B2	kg	2029	
generator in B3/B14	kg	2084	

PRO40S A/4


MOMENT OF INERZIA

SAE 14	kg·m ²	17,824
SAE 18	kg·m ²	18,217
SAE 21	kg·m ²	18,867
B3/B14	kg·m ²	16,617

DERATING CURVES

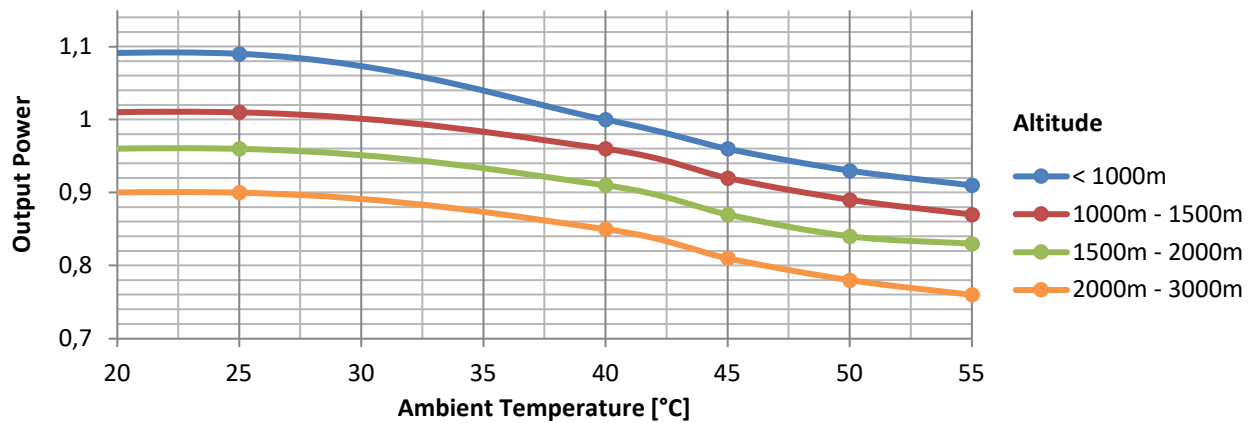


WIRING DIAGRAM

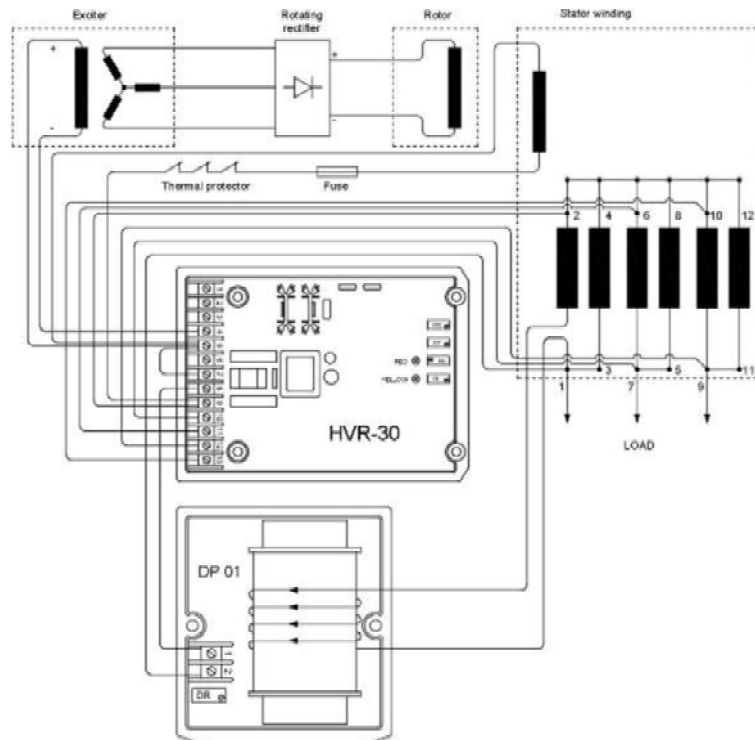

PRO40S A/4


TRANSIENT VOLTAGE VARIATION 50Hz

Transient Voltage Variation @ 50Hz

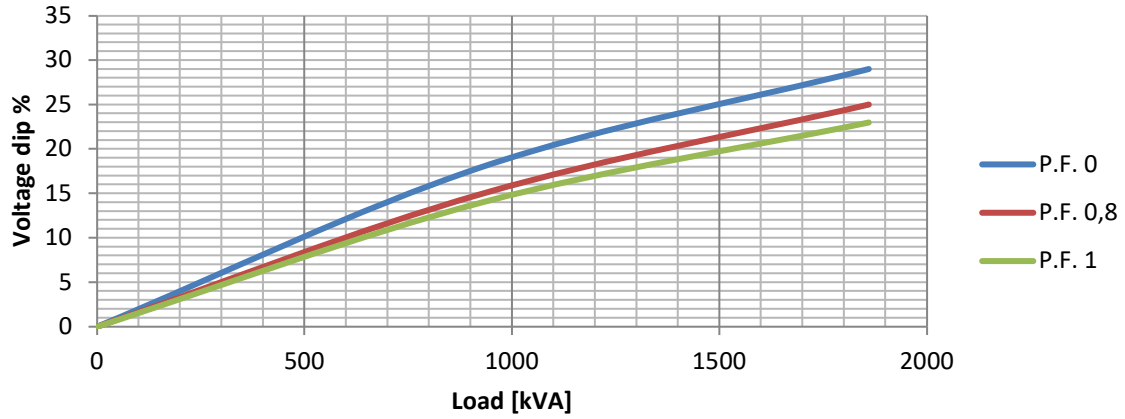


TRANSIENT VOLTAGE VARIATION 60Hz

Transient Voltage Variation @ 60Hz

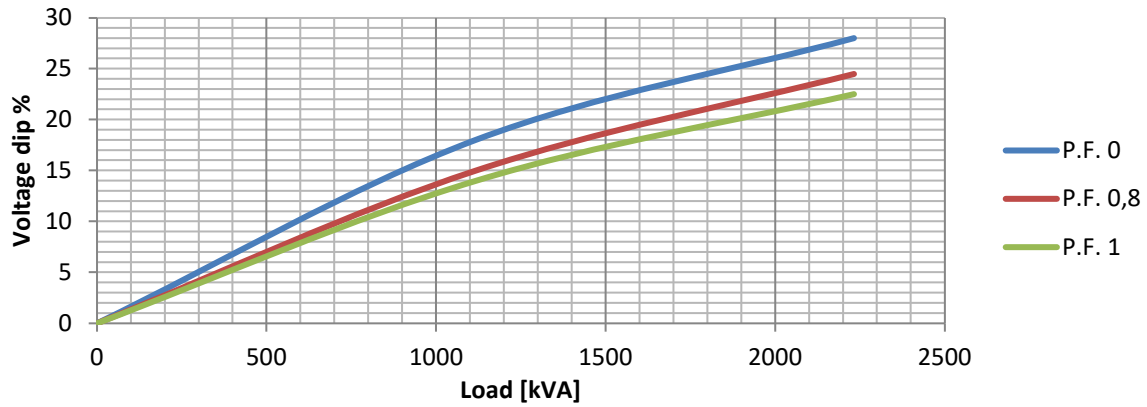


PRO40S A/4

EFFICIENCY 50Hz

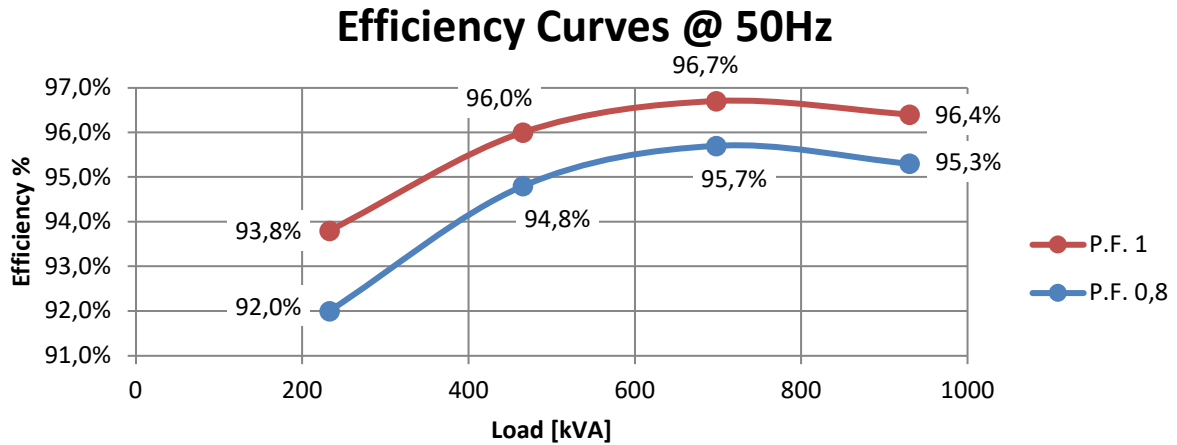


EFFICIENCY 60Hz

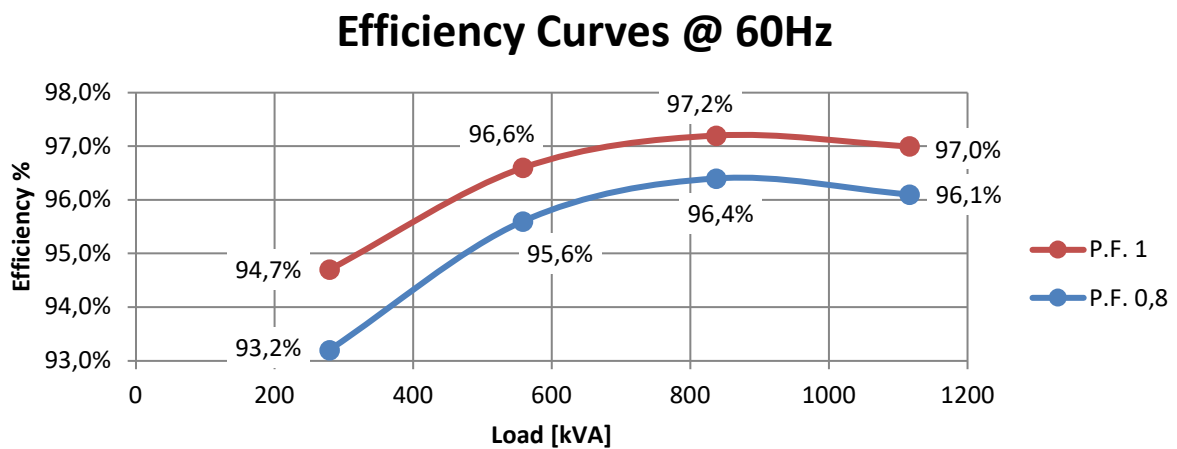


PRO40S A/4

FORMA - FORM B3/B14

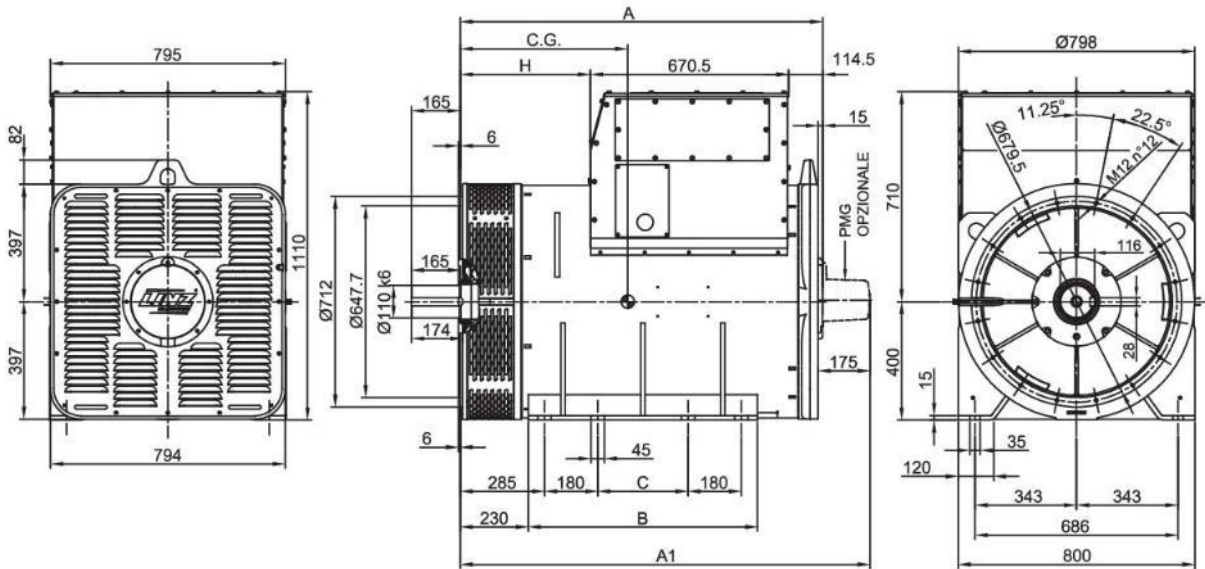

FORMA - FORM SAE

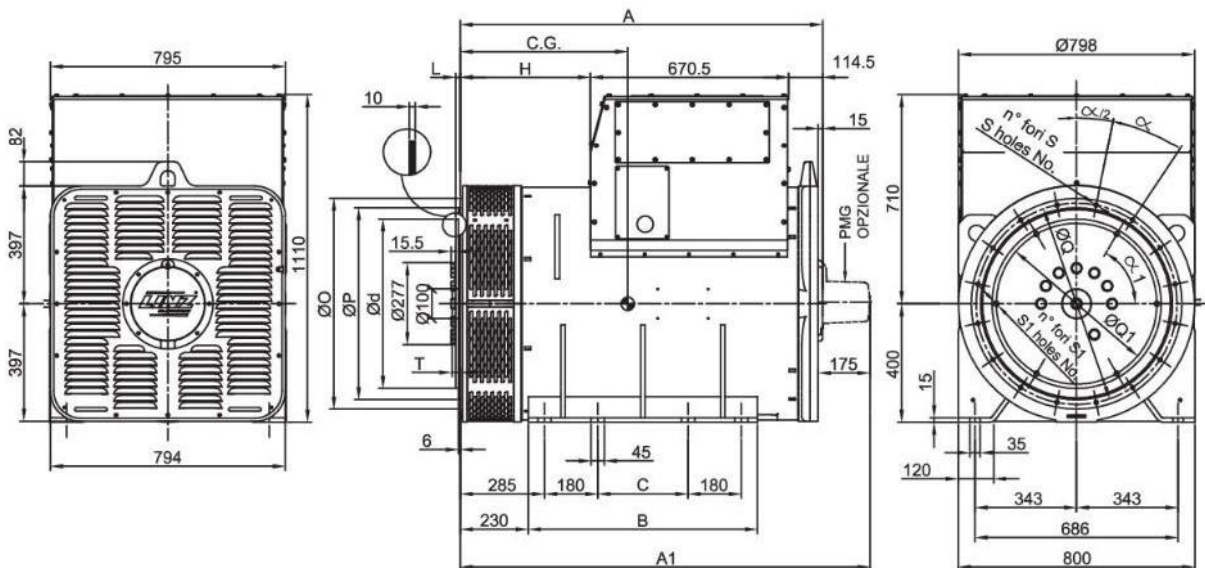

FORMA - FORM	A	H	A1	B	C	
B3/B14	PRO40 S	1225	440	1385	775	305
	PRO40 M	1420	635	1580	775	305
	PRO40 L	1625	840	1785	965	495
SAE	PRO40 S	1225	440	1385	775	305
	PRO40 M	1420	635	1580	775	305
	PRO40 L	1625	840	1785	965	495

TIPO - TYPE	C.G.
PRO40S A/4	597
PRO40S B/4	597
PRO40M C/4	648
PRO40M D/4	693
PRO40L E/4	795

SAE N.	FLANGIE - FLANGES - BRIDAS					
	ØO	ØP	ØQ	n. fori holes No.	S	α
OO	883	787.4	850.9	16	14	22.5°
O	710	647.7	679.5	16	14	22.5°

SAE N.	GIUNTI A DISCO - COUPLING DISCS - JUNTAS A DISCOS						
	L	Ød	ØQ1	n. fori holes No.	S1	α1	T
14	25.4	466.72	438.15	8	14	45°	2
18	15.7	571.5	542.92	6	17	60°	12
21	0	673.1	641.35	12	17	30°	28